


Low-ReflectiveDS™

LRDS-10 LOW REFLECTIVE

ARCHITECTURAL WINDOW FILM

INTERIOR

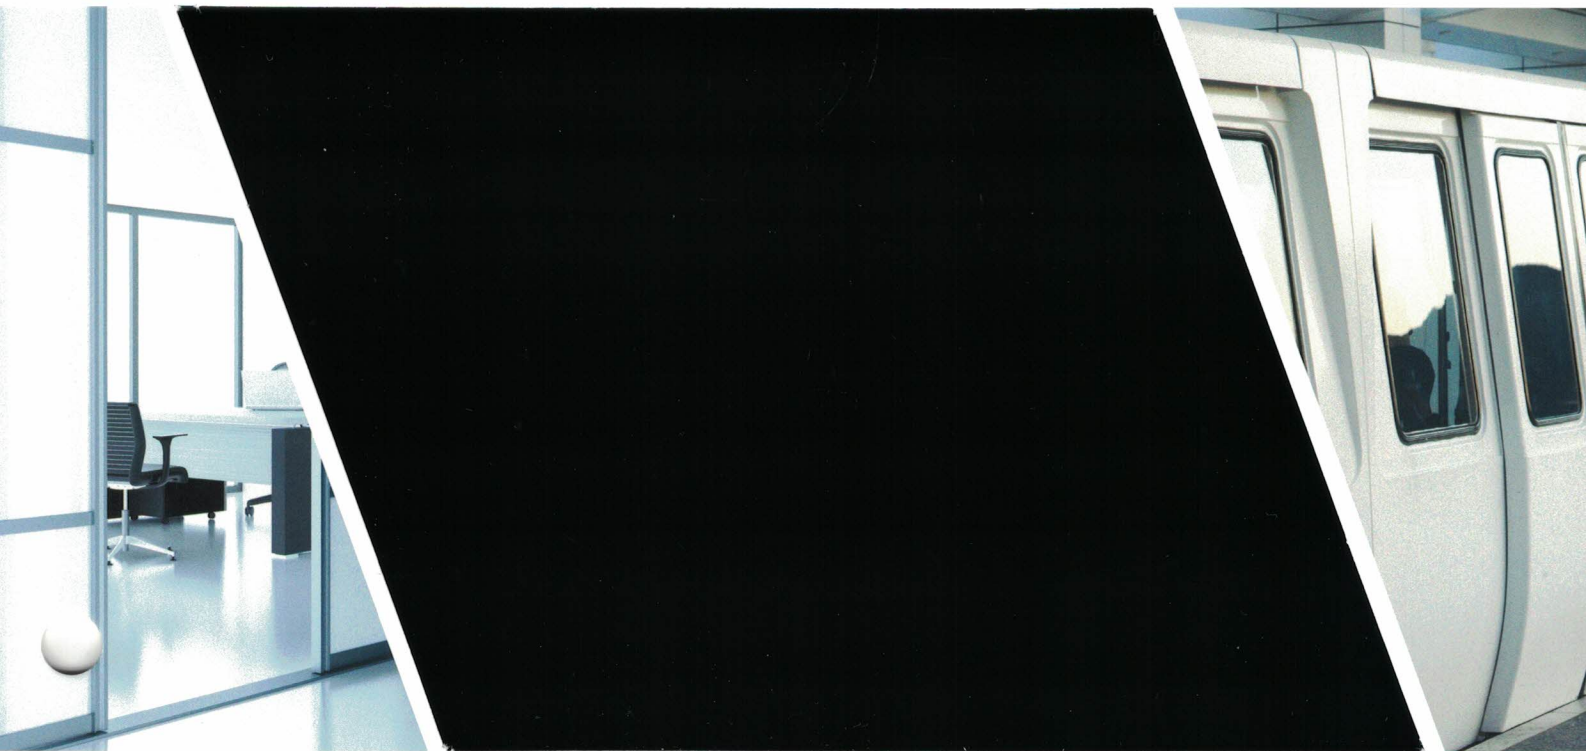

PRODUCT SPECIFICATIONS

Visible Light Transmission	7%
Total Solar Transmission	14%
Total Solar Reflectance	26%
Total Solar Absorbance	60%
Visible Light Reflectance	
Interior	11%
Exterior	11%
Winter U-Value	0.95
Ultraviolet (UV) Protection*	>99%
Glare Reduction	92%
Shading Coefficient	0.35
Solar Heat Gain Coefficient	0.31
Total Solar Energy Rejection	69%

*Wavelengths 300-380nm. Data captured using National Fenestration Rating Council's (NFRC) guidelines on single pane, nominal 1/8 inch (3mm) clear glass. Reported values are taken from representative product samples and are subject to normal manufacturing variances. Actual performance will vary based on a number of factors, including glass type and properties.

BENEFITS

- Clean, natural appearance
- Low interior and exterior reflectivity for maximum visibility
- Outstanding optical clarity and glare reduction
- Blocks 69% of the sun's energy, increasing comfort while reducing cooling costs
- Blocks over 99% of the sun's damaging UV rays helping to extend the life of upholstery, carpet and window treatments.
- Backed by a manufacturer's limited warranty*

* Certain restrictions apply; see an authorized dealer for manufacturer's limited warranty details.

SunTek
WINDOW FILMS

SPECIALTY