# Anti-Graffiti™

# 4M/6M ANTI-GRAFFITI

SAFETY & SECURITY WINDOW FILM

INTERIOR



PRODUCT SPECIFICATIONS	4M	6M
Visible Light Transmittance	86%	86%
Total Solar Transmittance	78%	76%
Total Solar Reflectance	9%	10%
Total Solar Absorbance	13%	14%
Visible Light Reflectance	9%	10%
Winter U-Value	1.09	1.09
UV Rejected	95%	95%
Glare Reduction	3%	3%
Shading Coefficient	0.93	0.93
Total Solar Energy Rejected	19%	19%

PHYSICAL PROPERT	TIES 4M	6M
Film Thickness	0.004"	0.006"
Single or Multi-Ply	Single	Multi
Tensile Strength	34,900 psi	32,200 psi
Break Strength	136 lbs/inch	190 lbs/inch
Elongation at Break	>100%	>100%
Peel Strength	1000 g/inch	1000 g/inch
Puncture Strength	93 lbs	132 lbs

All data values are representative and are provided for comparison purposes only.

### **BENEFITS**

- · Clear, virtually undetectable appearance
- Ideal for applications in areas where graffiti and/or vandalism is an issue
- Helps reduce expensive glass replacement by reducing vandalism and window damage
- Adhesive specially formulated for quick and residue-free removal
- Backed by an exclusive manufacturer's warranty




# Anti-Graffiti™

## 4M/6M ANTI-GRAFFITI

SAFETY & SECURITY WINDOW FILM

#### **EXTERIOR**

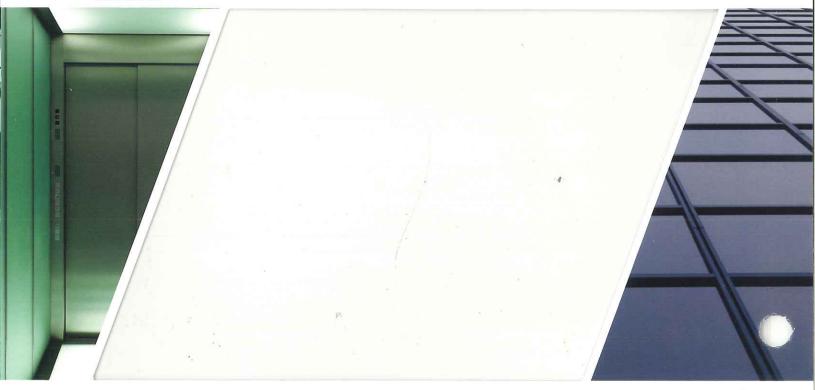

#### **ENERGY EFFICIENT**

SunTek® window films can significantly improve energy savings\* by reducing heat gain and eliminating hot spots. In fact, professionally installed SunTek® window films can prevent up to 84% of the sun's energy from altering the internal environment of a home or office building.

## **ENVIRONMENTALLY FRIENDLY**

All SunTek® products are environmentally friendly. As a company, SunTek® Window Films also supports environmental causes through volunteerism as well as employee and corporate donations. To learn more about our environmental efforts and for complete product information, visit our website at suntekfilms.com.

\*The amount of savings will differ based on window film used and the size, construction, and geographic location of the home/building.





