


White Out™

WHITE OUT

ARCHITECTURAL WINDOW FILM

INTERIOR

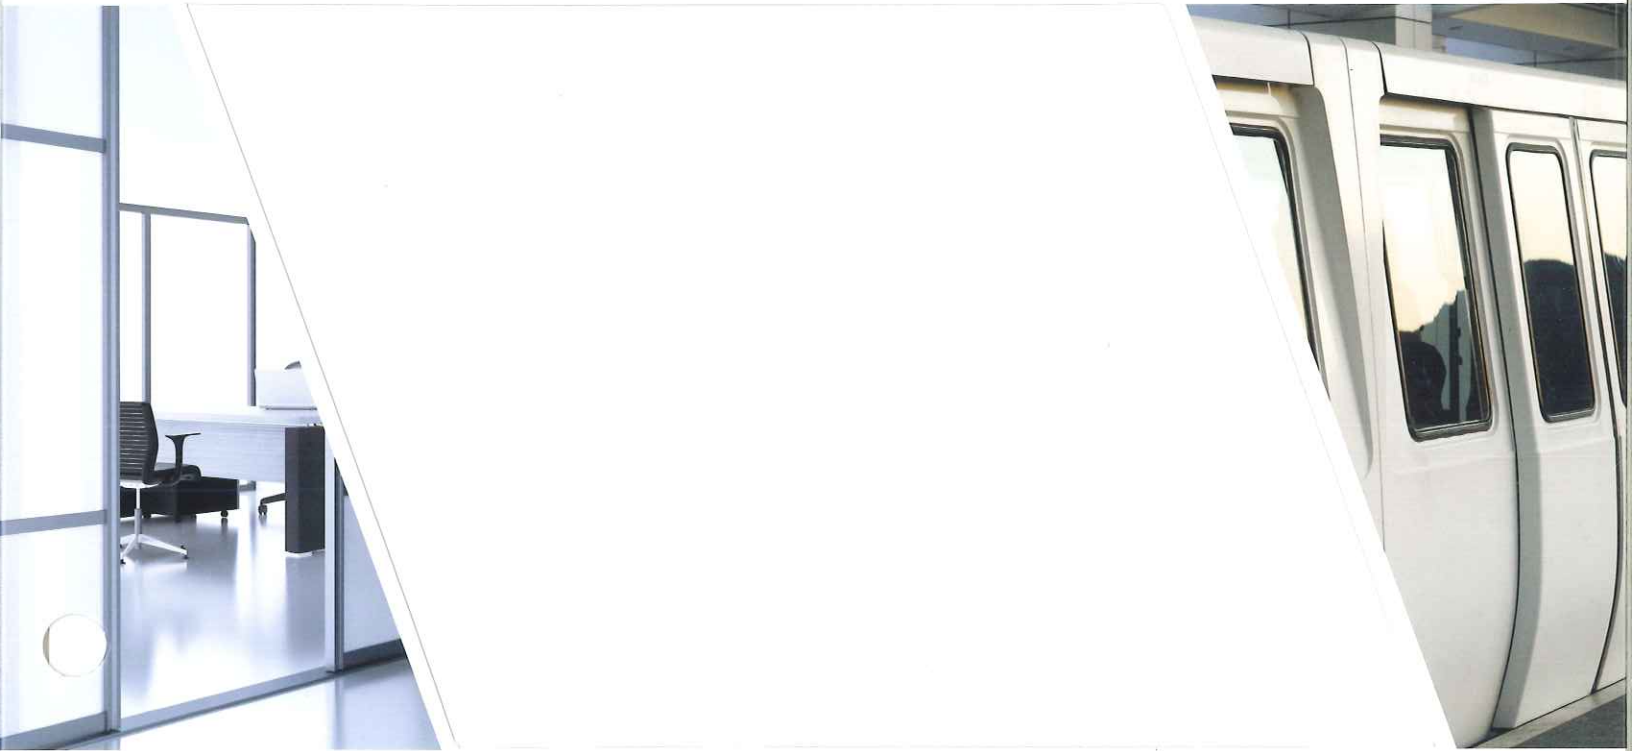

PRODUCT SPECIFICATIONS

Visible Light Transmittance	15%
Total Solar Transmittance	18%
Total Solar Reflectance	67%
Total Solar Absorbance	15%
Visible Light Reflectance	
Interior	85%
Exterior	85%
Winter U-Value	1.03
UV Rejected	99%
Glare Reduction	83%
Shading Coefficient	0.25
Solar Heat Gain Coefficient	0.22
Total Solar Energy Rejected	78%

All data values are representative and are provided for comparison purposes only.

BENEFITS

- White appearance provides total privacy while allowing natural sunlight to enter
- Blocks heat from the sun for a significantly more comfortable home or office building
- Safe for use on dual-pane glass
- Blocks 99% of damaging UV rays
- Provides 83% glare reduction
- Backed by an exclusive manufacturer's warranty

SunTek
WINDOW FILMS

SPECIALTY

White Out™

WHITE OUT

ARCHITECTURAL WINDOW FILM

EXTERIOR



ENERGY EFFICIENT

SunTek® window films can significantly improve energy savings* by reducing heat gain and eliminating hot spots. In fact, professionally installed SunTek® window films can prevent up to 84% of the sun's energy from altering the internal environment of a home or office building.

ENVIRONMENTALLY FRIENDLY

All SunTek® products are environmentally friendly. As a company, SunTek® Window Films also supports environmental causes through volunteerism as well as employee and corporate donations. To learn more about our environmental efforts and for complete product information, visit our website at suntekfilms.com.

*The amount of savings will differ based on window film used and the size, construction, and geographic location of the home/building.



AMERICAN SOCIETY OF
INTERIOR DESIGNERS

SunTek
WINDOW FILMS

PN0375 © 2015 Commonwealth Laminating & Coating, Inc. Printed in USA

SPECIALTY