UltraVisionDS™

ULVDS-40 SPECTRALLY SELECTIVE

ARCHITECTURAL WINDOW FILM

INTERIOR



PRODUCT SPECIFICATIONS

Visible Light Transmission	38%
Total Solar Transmission	27%
Total Solar Reflectance	18%
Total Solar Absorbance	55%
Visible Light Reflectance	
Interior	14%
Exterior	17%
Winter U-Value	1.04
Ultraviolet (UV) Protection	99%
Glare Reduction	58%
Shading Coefficient	0.51
Solar Heat Gain Coefficient	0.44
IR Energy Rejection (IRER)	61%
Selective IR Rejection (SIRR)	79%
Total Solar Energy Rejection	56%

Data captured using National Fenestration Rating Council's (NFRC) guidelines on single pane, nominal 1/8 inch (3mm) clear glass. Reported values are taken from representative product samples and are subject to normal manufacturing variances. Actual performance will vary based on a number of factors, including glass type and properties.

BENEFITS

- Elegant appearance
- Low interior and exterior reflectivity provides unaltered views
- · Outstanding optical clarity and glare reduction
- Blocks 56% of the sun's energy, increasing comfort while reducing cooling costs
- Blocks 99% of the sun's damaging UV rays helping to extend the life of upholstery, carpet and window treatments.
- Backed by an exclusive manufacturer's warranty




UltraVisionDS™

ULVDS-40 SPECTRALLY SELECTIVE

ARCHITECTURAL WINDOW FILM

EXTERIOR

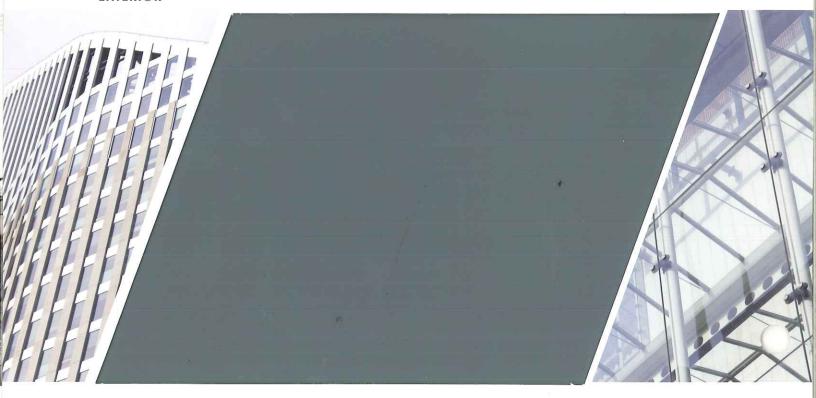

ENERGY EFFICIENT

SunTek® window films can significantly improve energy savings* by reducing heat gain and can help prevent hot spots. In fact, professionally installed SunTek® window films can help prevent up to 84% of the sun's energy from altering the internal environment of a home or office building.

ENVIRONMENTALLY FRIENDLY

All SunTek® products are environmentally friendly. SunTek® Window Films also supports environmental causes through volunteerism as well as employee and corporate donations. To learn more about our environmental efforts and for complete product information, visit our website at suntekfilms.com.

*The amount of savings will differ based on window film used and the size, construction, and geographic location of the home/building.







GMN 50185563 ©2018 Eastman Performance Films, LLC. Product brands referenced herein with a TM or the symbol are trademarks of Eastman Chemical Company or its subsidiaries. All other trademarks are the property of their respective owners. All rights reserved. No liability is accepted for errors, 03/18.