

Sentinel Plus QXN 40

Solar Gard® Solar Control Window Films

Performance results	1/8" (3mm)	1/4" (6mm)	1/4"+1/4" (6mm+6mm)
Visible light			
Transmittance %	40	39	35
Reflectance exterior %	6	6	7
Reflectance interior %	6	6	13
Glare reduction %	56	56	56
Solar energy			
Total solar energy rejected %	65	65	73
Solar heat gain coefficient	.35	.35	.27
Energy distribution			
Transmittance %	24	23	19
Absorptance %	36	37	40
Reflectance %	40	40	41
Thermal energy			
Emissivity	.66	.66	.66
Winter U-Factor (BTU hr/ft² °F)	1.03	1.02	.47
Fade control			
UV Tdw-ISO @ 300 to 700 nm %	26	26	23
Fade reduction %	69	68	67
Ultraviolet light blocked @ 300 to 380 nm %	>99	>99	>99


All performance results are based on the film applied to 1/8" (3mm), 1/4" (6mm) 1/4"+1/4" (6mm+6mm) thick, clear glass.

Physical properties nominal

Gauge 2.0 mil (50 micron)

Film performance

Performance results were measured with the film applied to 1/4-inch (6mm) clear glass.

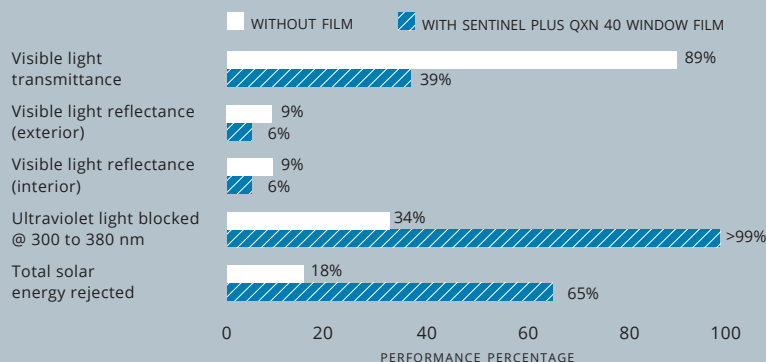

Notes

1. Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.
2. Performance results for glare and fade reduction are calculated by comparing filmed glass to that of untreated glazing.



www.solargard.com

SK0314SPQXN40OSW 02/26

© Copyright 2026 Saint-Gobain Performance Plastics Corporation and/or its affiliates • All Rights Reserved • www.solargard.com

♻️ Please recycle

