


SymphonyDS™

SYDS-35 DUAL REFLECTIVE

ARCHITECTURAL WINDOW FILM

INTERIOR

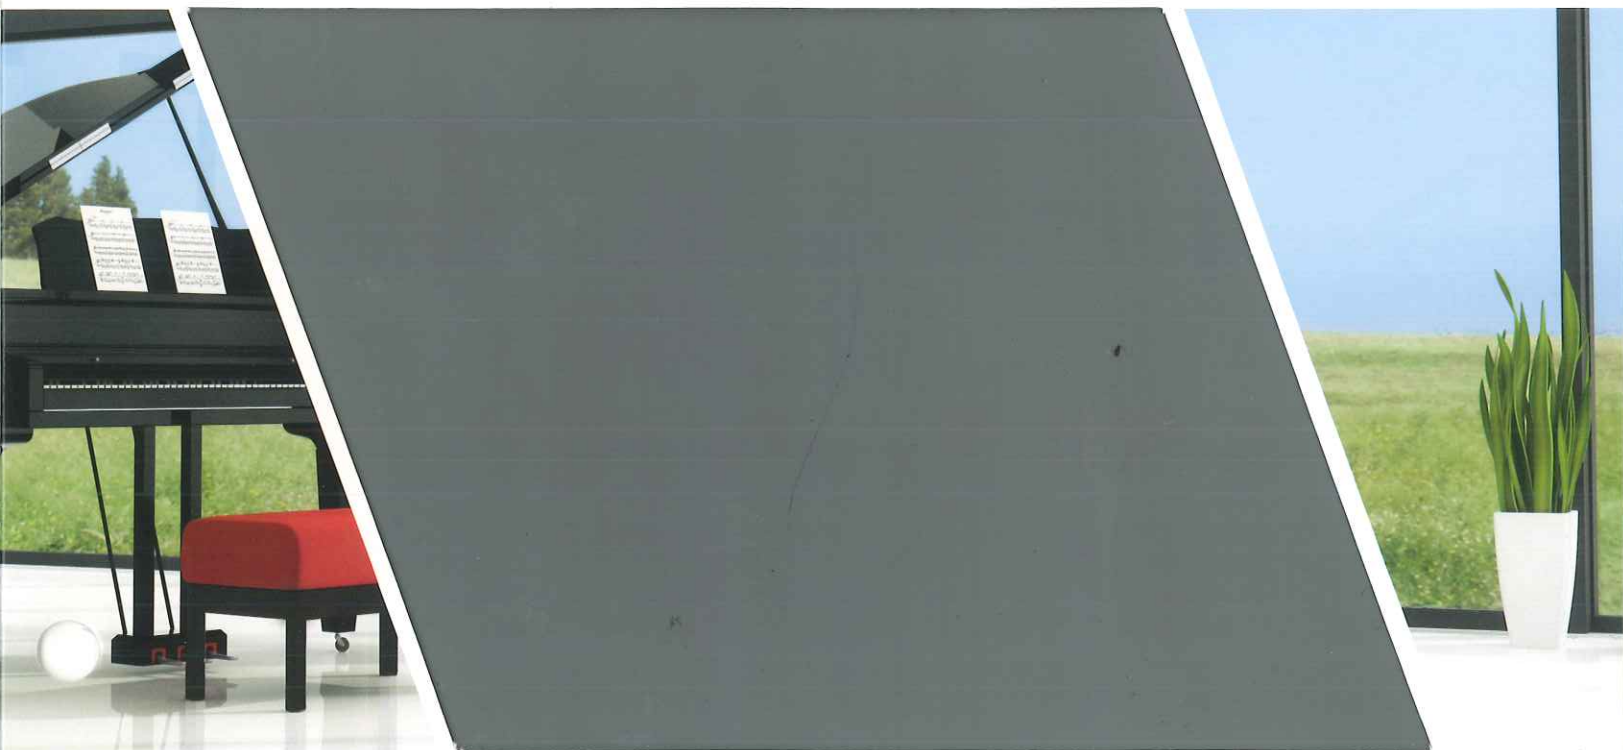

PRODUCT SPECIFICATIONS

Visible Light Transmittance	35%
Total Solar Transmittance	27%
Total Solar Reflectance	27%
Total Solar Absorbance	46%
Visible Light Reflectance	
Interior	18%
Exterior	25%
Winter U-Value	1.07
UV Rejected	99%
Glare Reduction	58%
Shading Coefficient	0.46
Solar Heat Gain Coefficient	0.40
Total Solar Energy Rejected	60%

All data values are representative and are provided for comparison purposes only.

BENEFITS

- Clean, natural appearance
- Low interior reflectivity provides unaltered views
- Unsurpassed solar performance is ideal for areas with excessive sun exposure
- Blocks 60% of the sun's energy, increasing comfort while reducing cooling costs
- Blocks over 99% of the sun's damaging UV rays extending the life of upholstery, carpet and window treatments
- Backed by an exclusive manufacturer's warranty

SunTek®
WINDOW FILMS

SYDS

SymphonyDS™

SYDS-35 DUAL REFLECTIVE

ARCHITECTURAL WINDOW FILM

EXTERIOR



ENERGY EFFICIENT

SunTek® window films can significantly improve energy savings* by reducing heat gain and eliminating hot spots. In fact, professionally installed SunTek® window films can prevent up to 84% of the sun's energy from altering the internal environment of a home or office building.

ENVIRONMENTALLY FRIENDLY

All SunTek® products are environmentally friendly. As a company, SunTek® Window Films also supports environmental causes through volunteerism as well as employee and corporate donations. To learn more about our environmental efforts and for complete product information, visit our website at suntekfilms.com.

*The amount of savings will differ based on window film used and the size, construction, and geographic location of the home/building.

SunTek® Window Films
345 Beaver Creek Drive
Martinsville, VA 24112

276.632.4991
suntekfilms.com



AMERICAN SOCIETY OF
INTERIOR DESIGNERS



GWIN 50185544 © 2017 Eastman Chemical Company Printed in USA

SYDS